


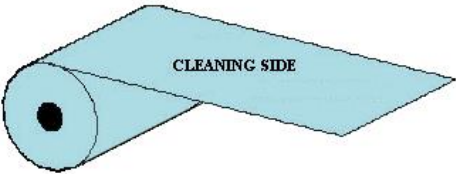

POLI-CLOTH AQUA

technical data sheet

DESCRIPTION	APPLICATION	FEATURES
Turquoise nonwoven, made of polyester fiber and wood pulp using spunlace technology	Developed for automatic blanket cleaning systems, available for all different types of sheet fed and web offset presses	Tightly pressed during the manufacturing process, it is a compact cloth that ensures the lowest release of lint during the cleaning process
		

INSTRUCTIONS OF USE

Cleaning side: Outside

PHYSICAL AND MECHANICAL PROPERTIES

Property		Test method	Unit	Nominal values		
Composition	Polyester fibres	-	%	45		
	Wood pulp			55		
Colour		-	-	Turquoise		
Weigth		EDANA 40.3-90	g/m ²	67		
Nominal thickness		EDANA 30.5-99	mm	0.265		
Tensile strength	Machine Direction	EDANA 20.2-89	N/5cm	150		
	Cross Direction			110		
Elongation at break	Machine Direction	EDANA 20.2-89	%	25		
	Cross Direction			50		
Absorption	Water	EDANA 10.4-02	%	450		
Fiber linting		Internal method 04	-	Low X	Medium	High

Width dimensional cutting tolerance for minirolls ±1mm
Width dimensional cutting tolerance for jumbo rolls ±3mm

The foregoing information and any consulting provided by us in terms of application engineering shall be given to our best knowledge, but shall not be considered binding information neither with regard to any third party industrial property rights. Any such consulting shall not relieve you from your own review of our current consulting information as to their suitability for the intended procedures and applications. It is the users responsibility to determine the suitability for his/her own use and application and test through the complete production process to ensure the product is fully suitable for the intended use, since conditions of use are beyond our control. The sale of our products shall be subject to our current General Terms and Conditions. We reserve the right to make changes that serve to improve the product.

T511 Rev.02nl 25/01/2023